

ASSEMBLY INSTRUCTIONS

WARNING! This unit must be assembled in the order shown. Failure to do so may result in damage to the parts or impede function of the unit.


General Instructions

- Read all Assembly Instructions prior to assembling the product
 - Make sure you have all parts before beginning assembly
- To avoid damage, assemble the product on a non-abrasive surface.

STEP 1: To install “easy-off chair back”, slide inside back receivers (1) onto the steel mechanism posts (2) in the base of the furniture (Figure A).


STEP 2: Press both sides seat back from the top downward firmly into place. The inside back automatically locks into place.

STEP 3: To remove the backs, use a screwdriver pulling outward on the black tab in the metal sleeve (Figure B) on both sides of the inside back receivers (1) and lift the back off the base of the furniture.

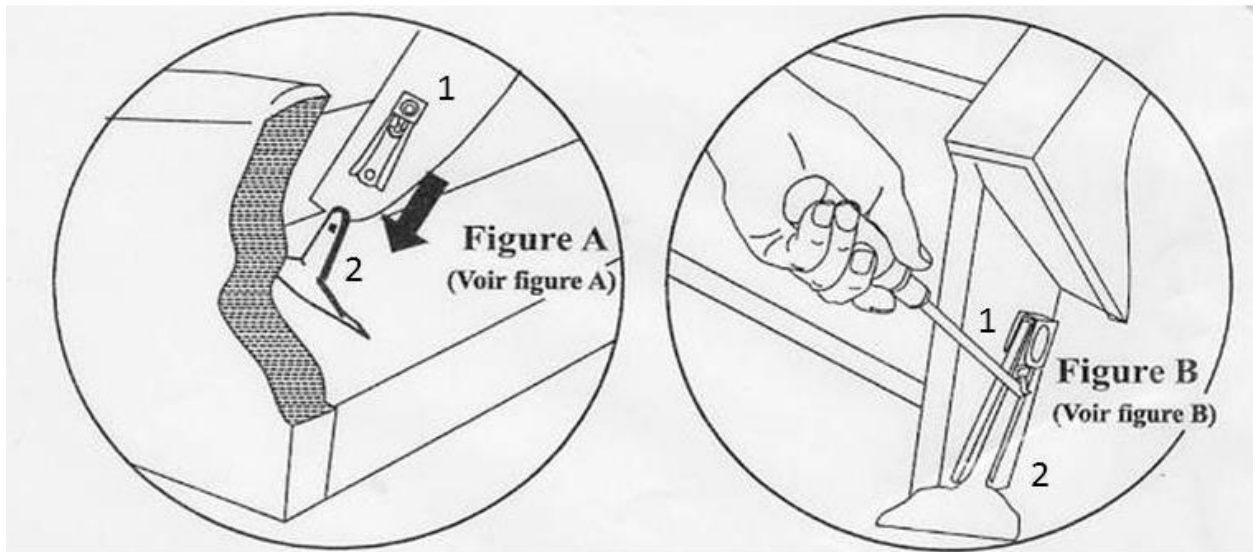

STEP 4: Pull down velcro seat back flap and align properly to wrap over the bottom of the base frame and attach/secure. Note: If the seat back is not properly seated on the posts, the velcro back flap will not attach easily.

3400488

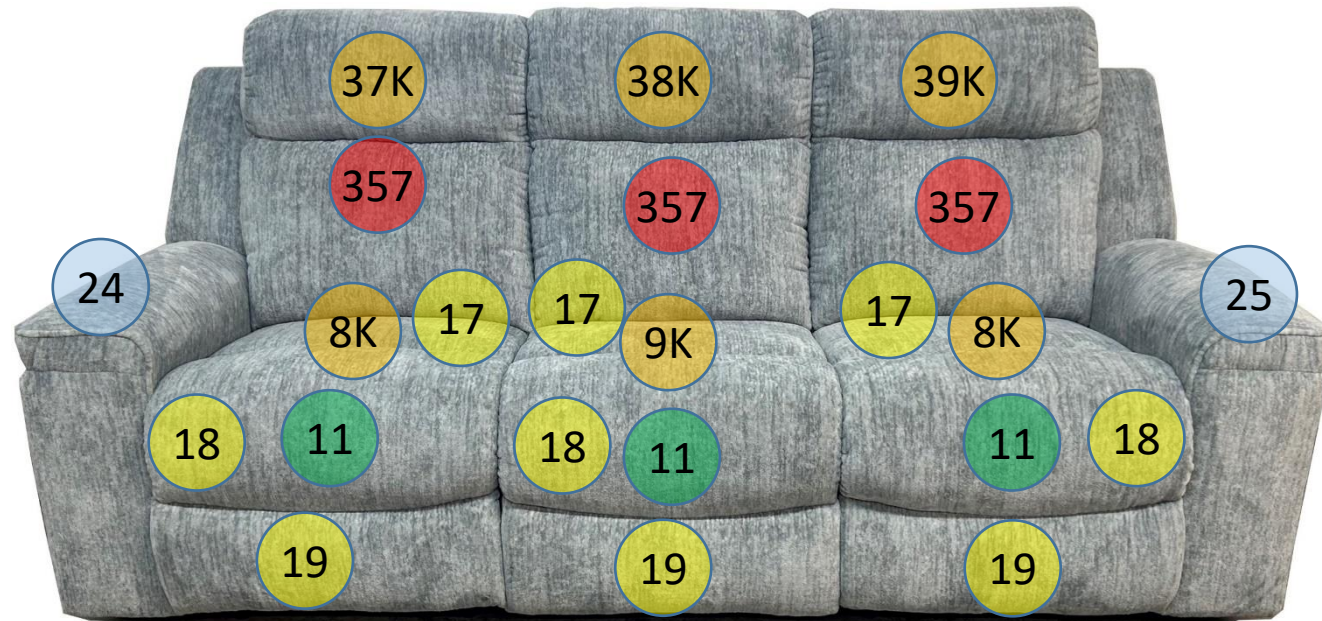

Call Out	Description
●	Blown Fiber
●	Cushion Chaise Pad - top Pad
●	Cushion Foam
●	KD Component
●	Cover



425



433




396



108



365



101



105




134



109

3400494

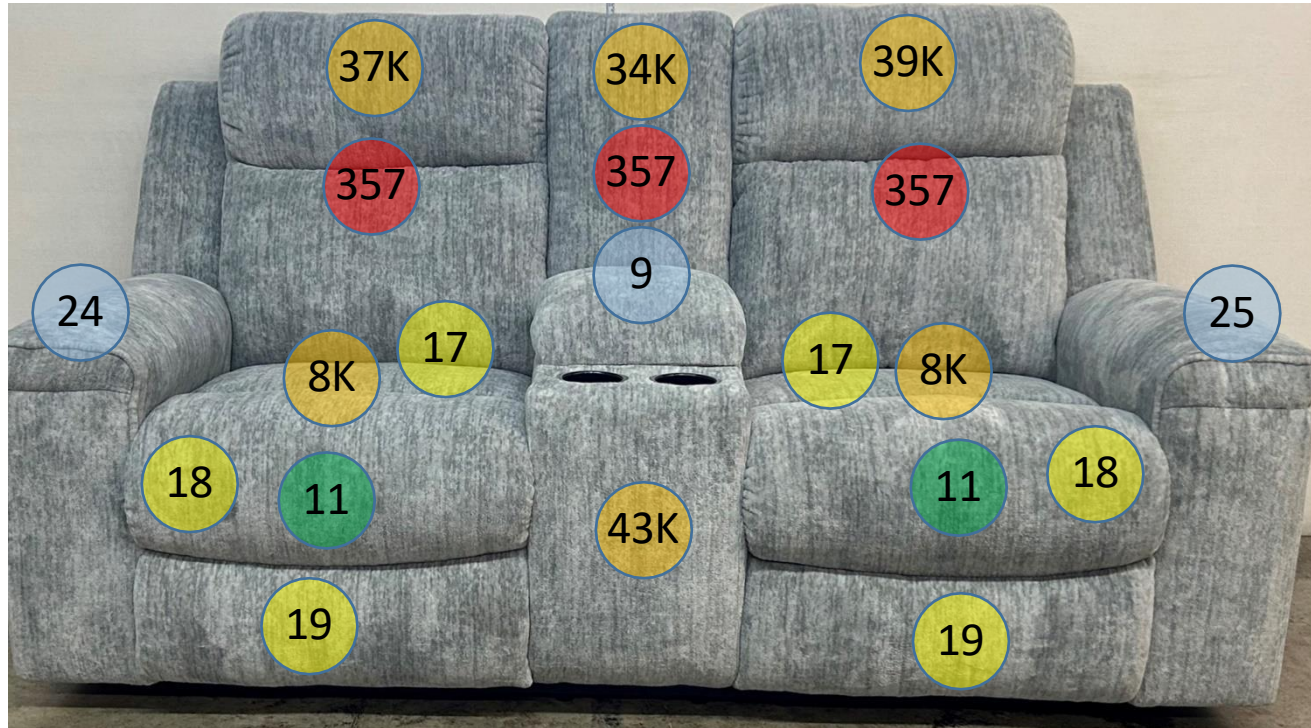


Call Out	Description
● (Red)	Blown Fiber
● (Yellow)	Cushion Chaise Pad - top Pad
● (Green)	Cushion Foam
● (Orange)	KD Component
● (Blue)	Cover



425



433



396




108



174

Effective to 07/05/25



101



105




134




109



212



442



71



175

Effective to 07/05/25




174

Effective from 07/05/25



175

Effective from 07/05/25

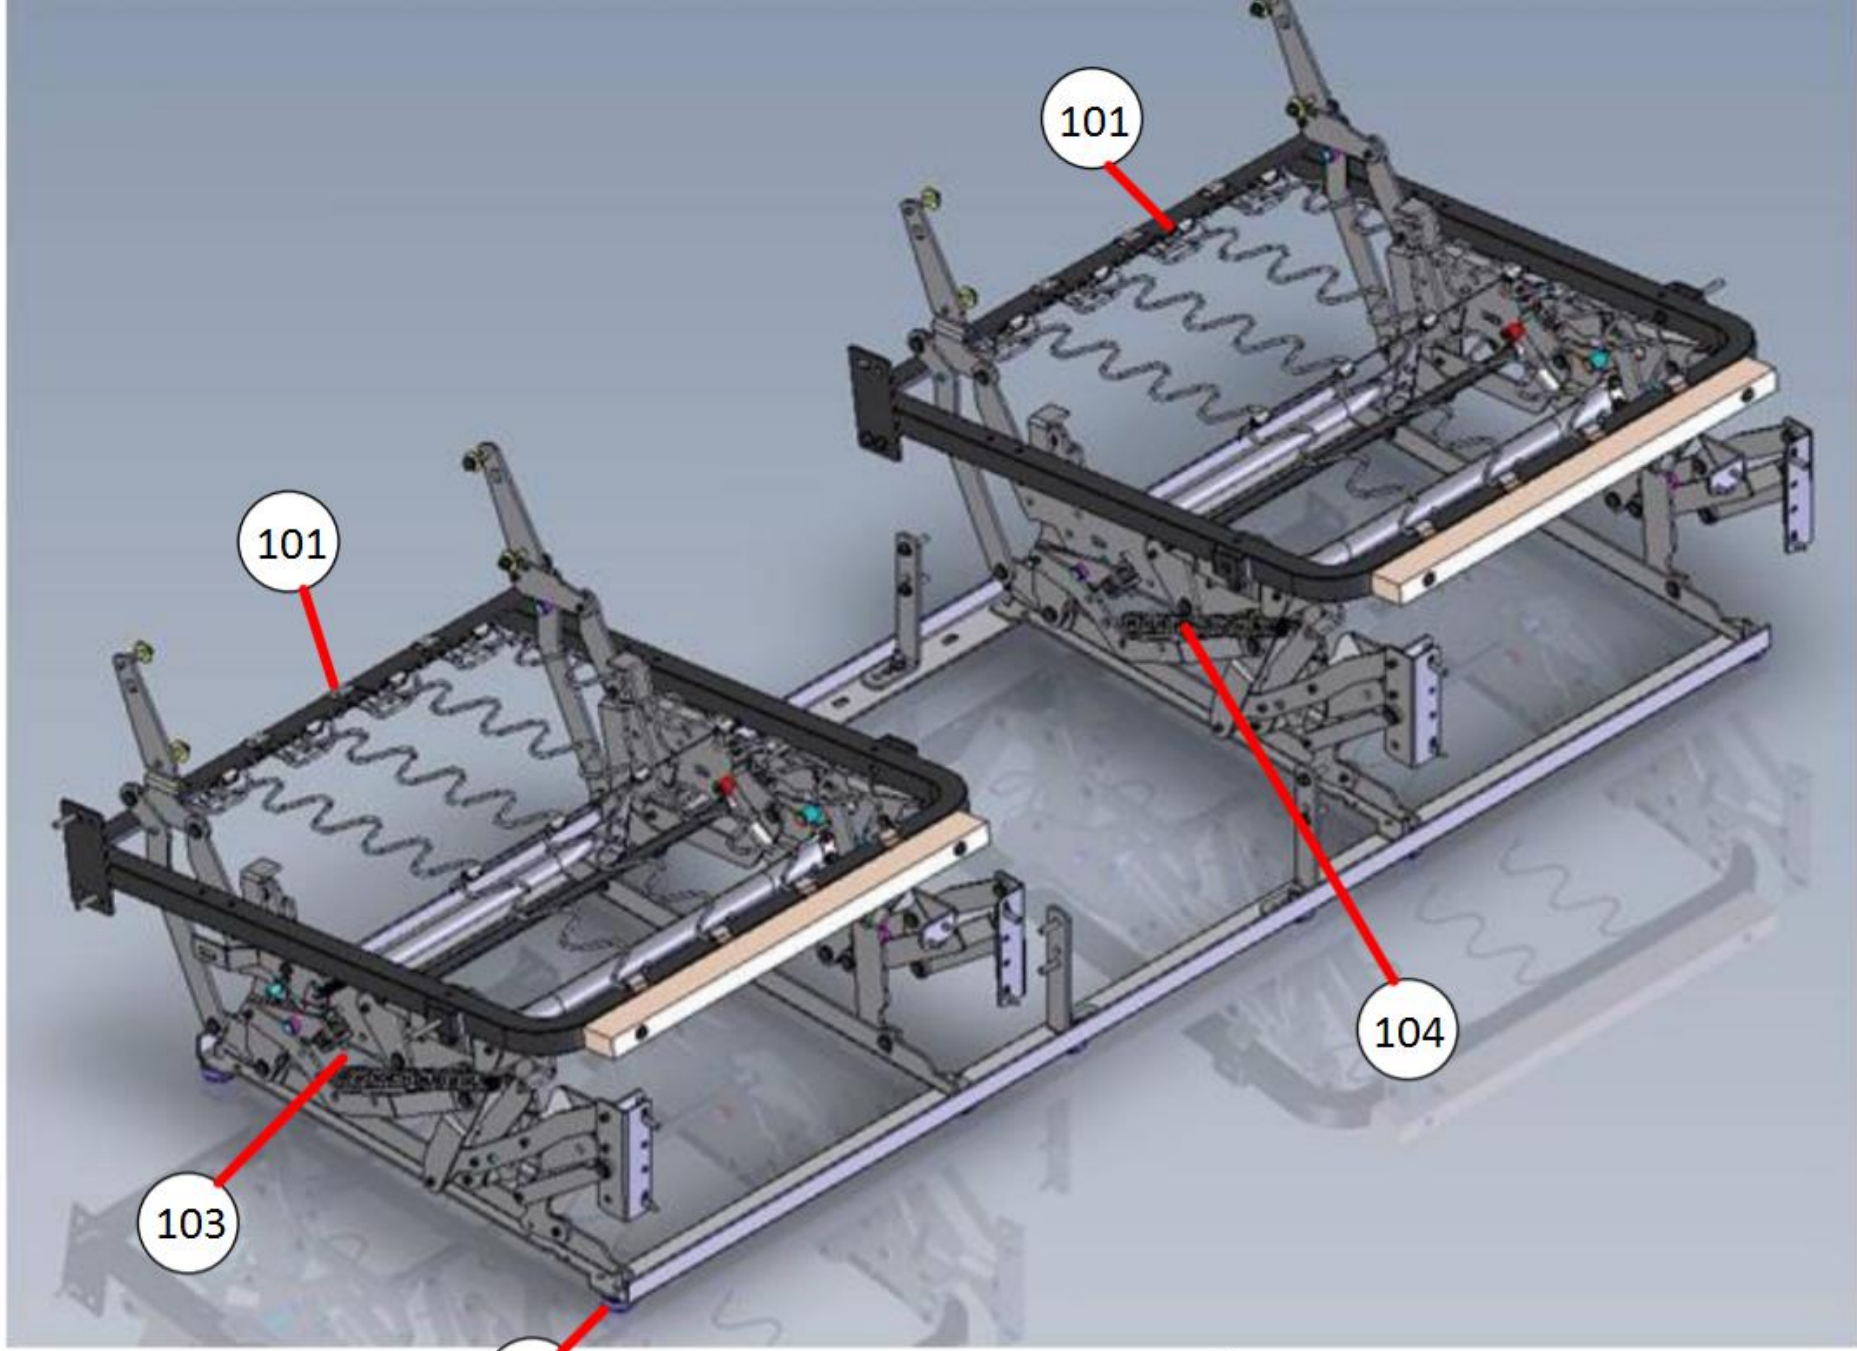

103 Details

