




Assembly Instructions

CM-FC606

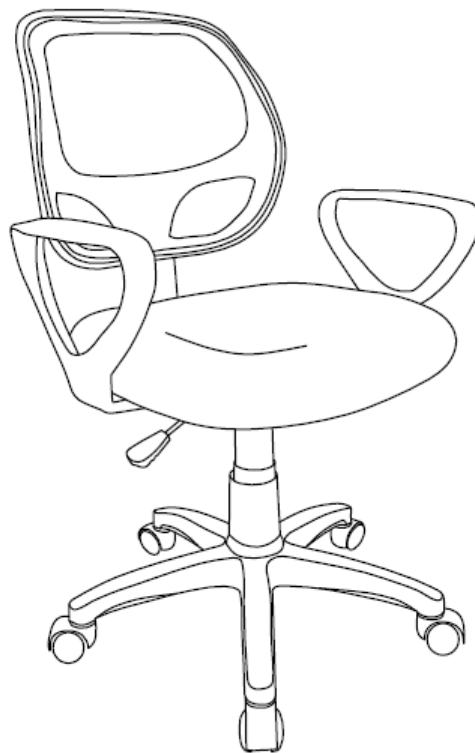

ASSEMBLY RATING

The Assembly Rating is a 5-point system that shows the degree of effort needed in assembling a specific product (with 1 being easy and 5 being difficult). For some products, two persons are recommended.

EASY  DIFFICULT

Tools Required for Assembly:

Allen Wrench




(Included)




ASSEMBLY & CARE ADVICE

FOR YOUR FURNITURE TO LAST, CORRECT ASSEMBLY AND PROPER MAINTENANCE ARE NECESSARY. PLEASE FOLLOW THE INFORMATION PROVIDED BELOW TO FULLY ENJOY YOUR FURNITURE.

BASIC ASSEMBLY TECHNIQUES

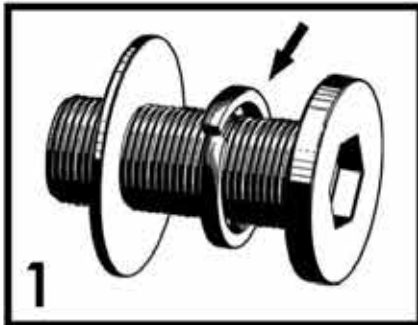


1 When lock or spring washer is used in an assembly, please make sure the lock or spring washer is placed between the larger flat washer and the head of the screw or bolt.

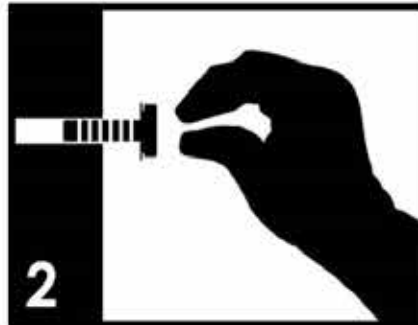


2 Position each part correctly and insert screws or bolts into their respective holes by hand tighten or using the proper hand tool. Only tighten when step is completed or when instructed to do so.



3 Use cardboard or carpet area when assembling furniture to prevent scratches. Make sure the furniture rests on a flat and level surface with each leg evenly touching the floor.

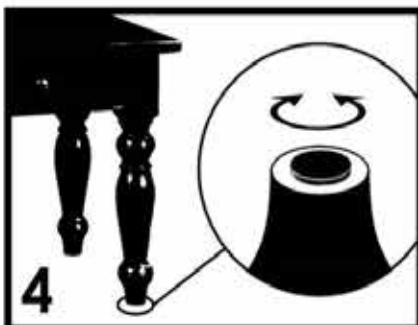

4 Some furniture comes with height adjustment knobs underneath each leg. To lower or to raise each leg, you need to turn clockwise or counterclockwise, respectively.

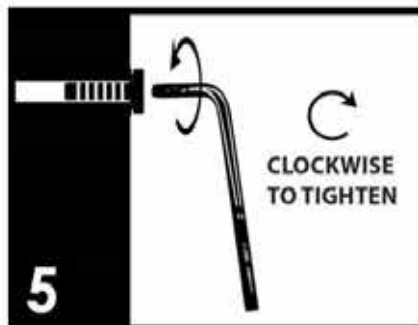

5 Make sure all parts are properly aligned, then use the appropriate hand tool to completely tighten the bolts or screws. Do not use power tools and do not overtighten.



6 Save the instructions and store the Allen wrench or any supplied tool for later maintenance. After two weeks, check and tighten any loose hardware and repeat again every six months thereafter.

IT IS THE USER'S RESPONSIBILITY TO MAINTAIN THE FURNITURE. THE HARDWARE MAY LOOSEN OVER TIME AND MAY CAUSE THE FURNITURE TO BE WOBBLY AND UNABLE TO SUPPORT ITS INTENDED WEIGHT CAPACITY. THIS MAY LEAD TO COLLAPSE AND MAY CAUSE SERIOUS INJURY.



FAILURE TO FOLLOW THE GUIDELINES ABOVE MAY RESULT IN INJURY AND/OR PROPERTY DAMAGE.











Before you begin, please read Page 2 of "Assembly and Care Advice".







And remember, do not tighten until each step is completed or instructed.


MD

Parts List

-  #1 x 1 pc
Backrest
-  #2 x 1 pc
Seat
-  #3 x 2 pcs
Armrest
-  #4 x 1 pc
5-Star Base
-  #5 x 1 pc
Seat Plate w/Handle
-  #6 x 1 pc
Cylinder Cover
-  #7 x 1 pc
Gas Lift Cylinder
-  #8 x 5 pcs
Caster


Hardware List

-  #A x 4 pcs
Bolt 1/4"x1-3/8"
-  #B x 6 pcs
Bolt 1/4"x1"
-  #C x 4 pcs
Bolt 1/4"x3/4"
-  #D x 10 pcs
Flat Washer 14mm
-  #E x 4 pcs
Flat Washer 18mm
-  #F x 1 pc
Allen Wrench

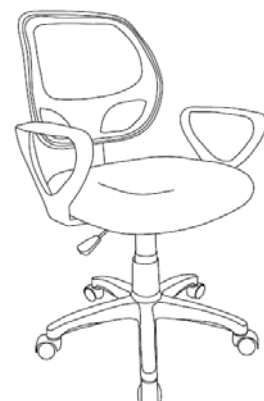




Insert the 5 casters (#8) into the 5-star base (#4). Then insert the gas lift cylinder (#7) into the 5-star base (#4) and the cylinder cover (#6) over the gas lift cylinder (#7).

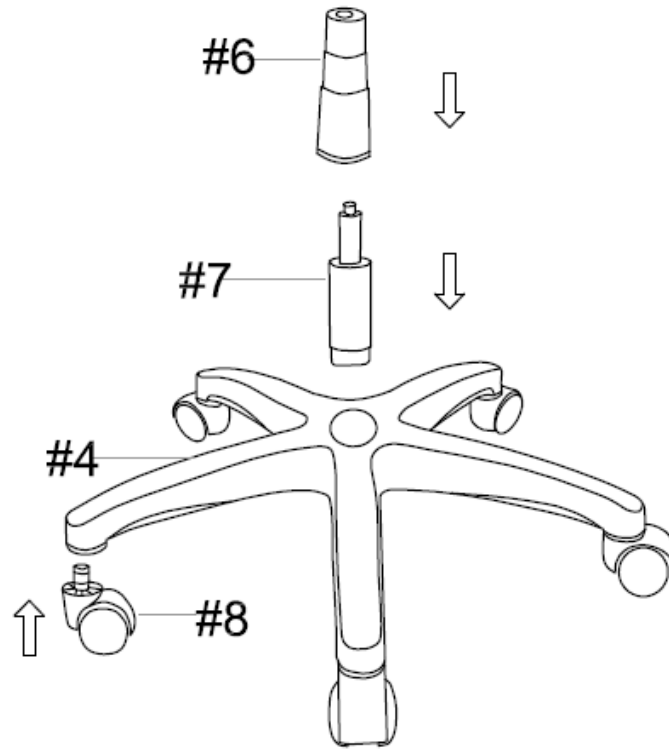

#B x 6 pcs
#D x 6 pcs

Turn right (clockwise) to tighten

- I. Align the two armrests (#3) with the pre-drilled holes on the bottom of the seat (#2).
- II. Prepare 6 bolt assemblies by inserting the 6 flat washers (#D) onto the 6 bolts (#B).
- III. Insert the bolt assemblies through the armrests (#3) and secure those bolts using the Allen wrench (#F) to lock them with the seat (#2).

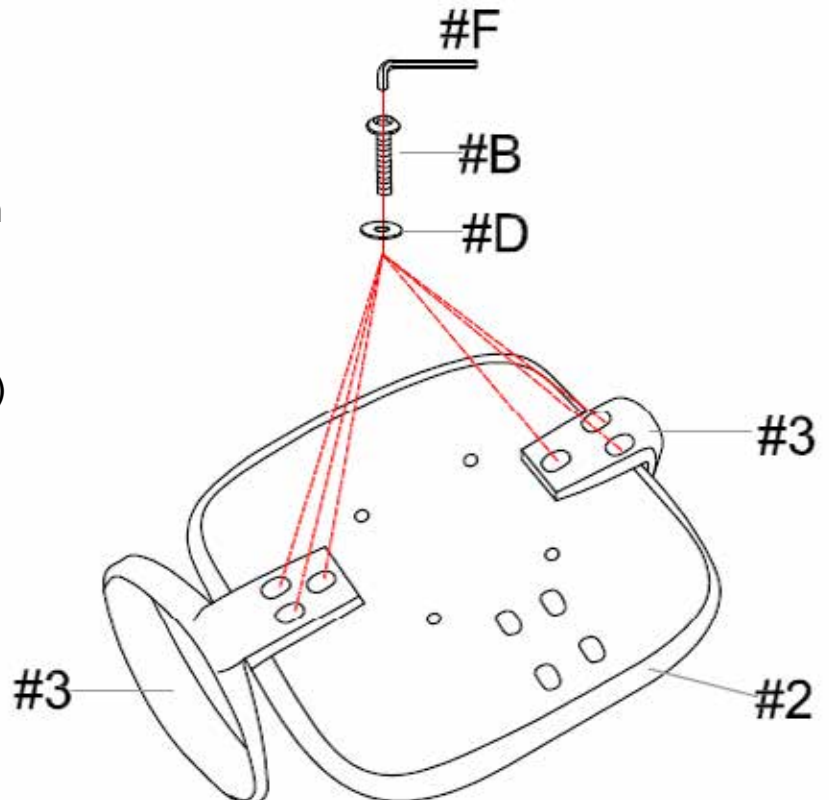




#A x 4 pcs
#D x 4 pcs

Turn right (clockwise) to tighten


- I. Align the backrest (#1) with the pre-drilled holes on the bottom of the seat (#2).
- II. Prepare 4 bolt assemblies by inserting the 4 flat washers (#D) onto the 4 bolts (#A).
- III. Insert the bolt assemblies through the backrest (#1) and secure those bolts using the Allen wrench (#F) to lock them with the seat (#2).

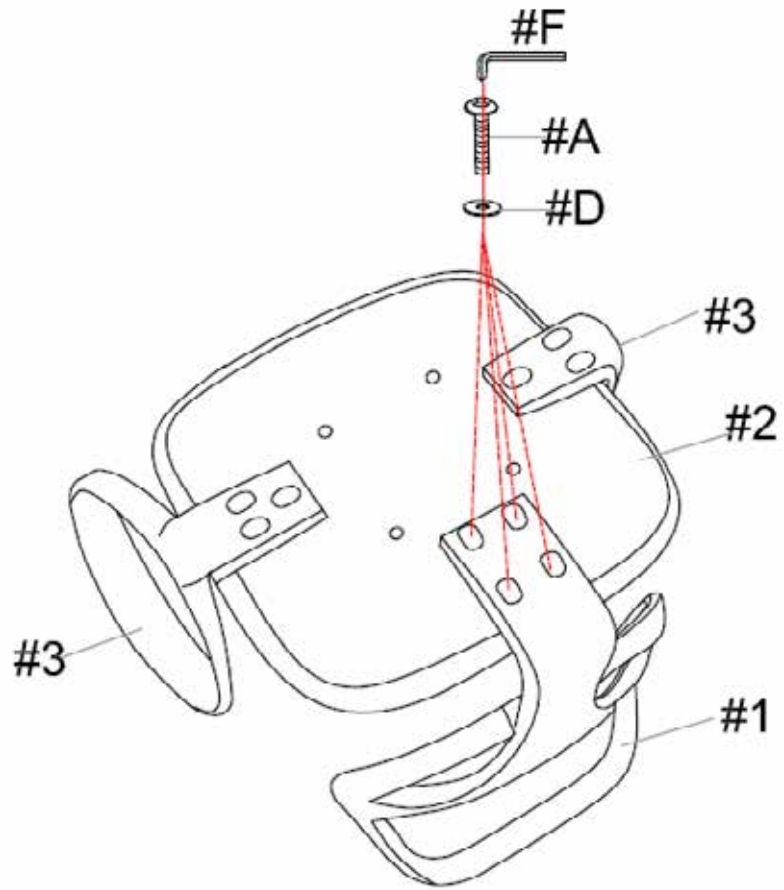

#C x 4 pcs
#E x 4 pcs


Turn right (clockwise) to tighten

- I. Align the seat plate with handle (#5) with the pre-drilled holes on the bottom of the seat (#2).
- II. Prepare 4 bolt assemblies by inserting the 4 flat washers (#E) onto the 4 bolts (#C).
- III. Insert the bolt assemblies through the seat plate with handle (#5) and secure those bolts using the Allen wrench (#F) to lock them with the seat (#2).

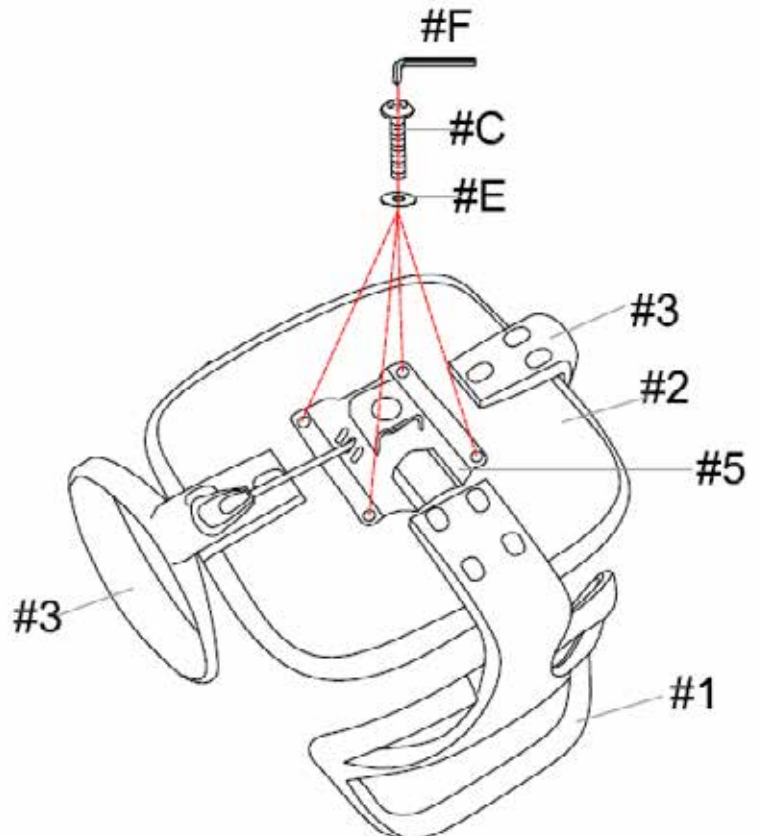



- I. Place the assembled seat plate with handle assembly from Step 4 over the top of the assembled gas lift cylinder assembly from Step 1.
- II. Check to make sure all parts are secured, the chair is stable and the up/down lift is working properly.

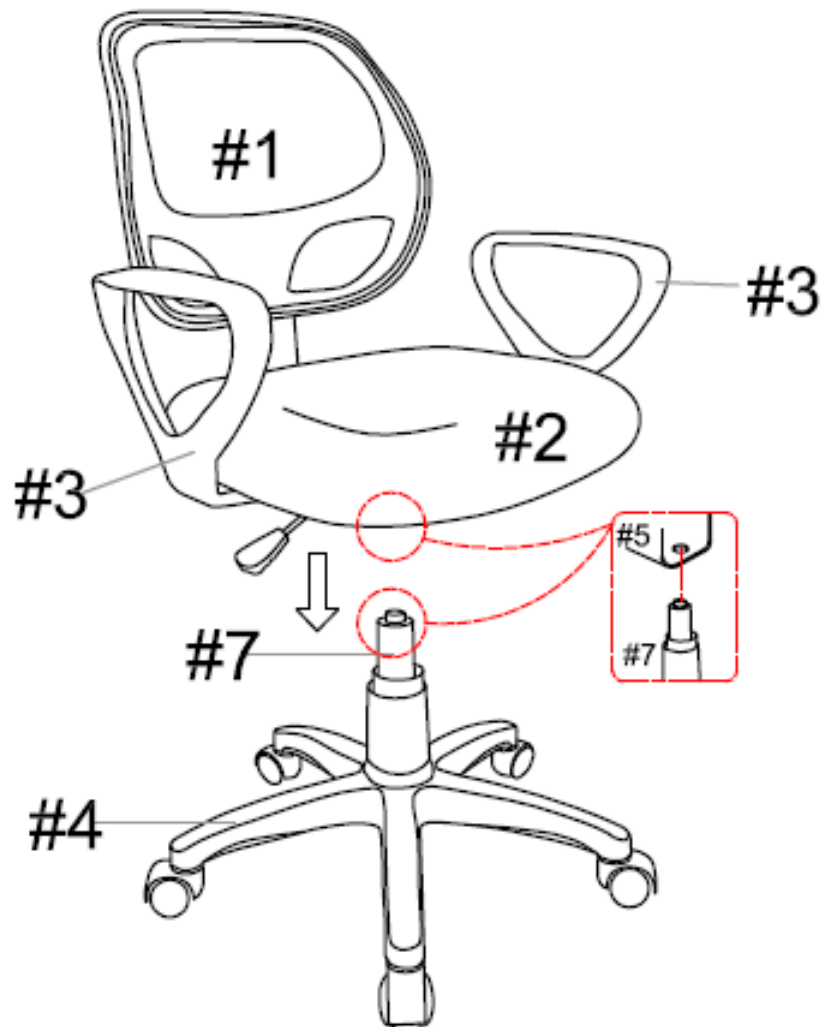

ASSEMBLY IS COMPLETED